

**ИССЛЕДОВАНИЕ ВЛАГОУДЕРЖИВАЮЩЕЙ СПОСОБНОСТИ
РЖАНО-ПШЕНИЧНОЙ КЛЕЙКОВИНЫ И РЖАНО-ПШЕНИЧНОЙ
МУКИ С ДОБАВЛЕНИЕМ ПОЛИФУНКЦИОНАЛЬНОЙ ПИЩЕВОЙ
ДОБАВКИ «МАГНЕТОФУД»**

**INVESTIGATION OF THE MOISTURE-RETAINING POWER OF RYE-
WHEAT GLUTEN AND FLOUR WITH POLYFUNCTIONAL FOOD
SUPPLEMENT “MAGNETOFOOD”**

Iryna TSYKHANOVSKA

*Department of food and chemical technologies
«Ukrainian Engineering-Pedagogics Academy»
16 Universitetska str., Kharkiv, Ukraine, 61003
cikhanovskaja@rambler.ru*

Victoria EVLASH

*Department of Chemistry, Microbiology and Food Hygiene
«Kharkov State University of Nutrition and Trade»
333 Klochkivska str., Kharkiv, Ukraine, 61051
evlashvv@gmail.com*

Alexandr ALEXANDROV

*Department of food and chemical technologies
«Ukrainian Engineering-Pedagogics Academy»
16 Universitetska str., Kharkiv, Ukraine, 61003
alexandrov.a.v.a.v@gmail.com*

Tetiana LAZAREVA

*Department of food and chemical technologies
«Ukrainian Engineering-Pedagogics Academy»
16 Universitetska str., Kharkiv, Ukraine, 61003
Lazareva_T.A@ukr.net*

Karina SVIDLO

*Department of Technology and Restaurant Business Organization
«Kharkov Trade and Economic Institute of Kiev National Trade
and Economic University of Ukraine»
8 O. Yarosha lane, Kharkiv, Ukraine, 61045
karinasvidlo@rambler.ru*

Tatyana GONTAR

*Department of food and chemical technologies
«Ukrainian Engineering-Pedagogics Academy»
16 Universitetska str., Kharkiv, Ukraine, 61003
taty-gontar@ukr.net*

Liubov YURCHENKO
Department of Social and Humanitarian Disciplines
«National University of Civil Defense of Ukraine»
96 Chernyshevsky str., Kharkiv, Ukraine, 61002
7733153@ukr.net

Larisa PAVLOTSKA
Department of Chemistry, Microbiology and Food Hygiene
«Kharkov State University of Nutrition and Trade»
333 Klochkivska str., Kharkiv, Ukraine, 61051
chem_mikvo@hduht.edu.ua

Abstract

The moisture-retaining power (WRP) of dough is one of main functional technological parameters, because it influences the output, structural-mechanical properties and quality characteristics of bread and bakery products. For increasing WRP of rye-wheat dough, the polyfunctional food supplement “Magnetofood” is offered. For determining, what component of rye-wheat dough plays the leading role in absorbing and retaining water – there was studied the influence of the polyfunctional food supplement “Magnetofood” on water-absorbing and water retaining power of rye-wheat gluten and rye-wheat flour. It was established, that adding the food supplement “Magnetofood” in amount 0,15 % for the mass of rye-wheat gluten and rye-wheat flour increases their water-retaining power by 2,0 % and by 2,5 % respectively. There were studied water binding forms in gluten and flour at implementing the food supplement “Magnetofood” by the indicator method and one of differential-thermal analysis (DTA). There were established the quantity ratios of free and bound moisture in gluten and flour with food supplement “Magnetofood”. It was established, that model systems, based on rye-wheat gluten and rye-wheat flour, enriched with “Magnetofood” supplement, demonstrate the increase of the amount of free and bound moisture in 1,3 and in 0,35 times in experimental samples of model systems based on gluten, respectively; in 1,2 and 0,29 times in experimental samples of model systems, based on flour, respectively.

DTA method established the increase of the total content of adsorptively and osmotically bound moisture in experimental samples of model systems based on rye-wheat gluten and rye-wheat flour at adding the food supplement “Magnetofood”:

– adsorptively bound moisture grows: from 15, 3% to 19,7% (samples of model systems based on rye-wheat gluten) and from 18,3% to 25,4% (for samples of model systems based on rye-wheat flour);

– osmotically bond water grows: from 10, 3% to 14, 4% (for samples of model systems based on rye-wheat gluten) and for 14,5% to 17,0% (for samples of model systems based on rye-wheat flour).

It was revealed, that the increase of the moisture-retaining power of rye-wheat gluten and rye-wheat flour, enriched with the food supplement “Magnetofood” is explained by the “cluster-loop-chain” model of hydration of gluten proteins at “Magnetofood” nanoparticles. The obtained experimental data may be used at

elaborating the technology of rye-wheat bread, enriched with the polyfunctional food supplement “Magnetofood”; and also at elaborating innovative technologies of food systems with proteins as gliadin, glutenin and so on.

The results of this study have the theoretical and practical interest for the world scientific society, because they may be used for decelerating hardening processes, prolongation of storage terms, increase of output and improvement of quality parameters of bread and bakery products.

Keywords: polyfunctional food supplement “Magnetofood”, rye-wheat gluten and flour, form of moisture bound, moisture-retaining power, indicator method, method of differential-thermal analysis, “cluster-loop-chain” model of proteins hydration.

1. Introduction

Food technologies use diverse food and bio-supplements, increasing the moisture-retaining power (MRP) of both raw materials and semi-products and also ready products. MRP increase favors the increase of the quality and output of ready products; decrease of their cost price [1–4].

Modern food technologies actively use biologically active substances of vegetable, fruit and herbal supplements [5–10] and also biocompounds of different chemical composition: soya, nut, enzymes, micro-water plants for increasing MRP [11–14].

For increasing the moisture-retaining power of flour and dough, mineral compounds (ammonium salts of orthophosphate acid, sodium and potassium orthophosphates) are used in bakery [1, 2].

Information sources [1–14] demonstrate the absence of data about polyfunctional food supplements of the complex action, and especially, nano-powder ones that increase the moisture-retaining power of both raw materials and semi-products and also ready products, made of them.

The revealed properties of the polyfunctional food supplement “Magnetofood” allow to recommend it for implementing in food systems, especially in rye-wheat gluten and flour. The aim of adding “Magnetofood” is to increase the moisture-retaining power of rye-wheat gluten and rye-wheat flour. “Magnetofood” is a nano-powder with the large specific and active surface [15–18].

2. Materials and Methods

2.1. Studied materials and equipment, used in the experiment

The object of the research is the technology of rye-wheat bread.

The study of the influence of polyfunctional food supplement “Magnetofood” on the moisture-absorbing and moisture-retaining power (MRP) of rye-wheat gluten and flour was realized on the model systems:

– Control sample 1 – dry rye-wheat gluten, received from rye-wheat flour, according to SSU-B 4583:2006. The ratio of rye peeled flour and wheat flour of the first sort is 60:40 according to the base recipe of rye-wheat bread “Darnitsky” [19]. At preparing control sample 1, dry rye-wheat gluten was added with water in amount 0,16 % of the mass of dry gluten. Then the mixture was accurately blended during 5–

7 min;

– sample 2 – dry wheat-rye gluten with the polyfunctional food supplement “Magnetofood” in amount 0,15 % of the gluten mass as powder [17]. Experimental sample 2 was prepared analogously to control sample 1, but the food supplement “Magnetofood” was implemented in the aforesaid amount;

– Control sample 3 – raw rye-wheat gluten, received from rye-wheat flour, according to SSU-B 4583:2006. The ratio of rye peeled flour and wheat flour of the first sort is 60:40 according to the base recipe of rye-wheat bread “Darnitsky” [19];

sample 4 – raw rye-wheat gluten with the polyfunctional food supplement “Magnetofood” in amount 0,15 % of the mass of raw gluten as powder [17]. Experimental sample 4 was prepared analogously to control sample 3, but the food supplement “Magnetofood” was implemented in the aforesaid amount and accurately blended during 5–7 min;

– control sample 5 – rye-wheat flour according to SSU-B 4583:2006. The ratio of rye peeled flour and wheat flour of the first sort is 60:40 according to the base recipe of rye-wheat bread “Darnitsky” [19]. At preparing control sample 5, dry rye-wheat flour was added with water in amount 0,67 % to the mass of dry flour. Then the mixture was accurately blended during 8–10 min;

–sample 6 – wheat-rye flour with the polyfunctional food supplement “Magnetofood” in amount 0,15 % of the gluten mass as powder [17]. Experimental sample 6 was prepared analogously to control sample 5, but the food supplement “Magnetofood” was implemented in the aforesaid amount.

Fig. 1 presents the experimental samples of rye-wheat gluten, **fig. 2** – the experimental samples of rye-wheat flour.



a b



c d

Fig. 1. The experimental samples of rye-wheat gluten: *a* – sample 1; *b* – sample 2; *c* – sample 3; *d* – sample 4.



a b

Fig. 2. The experimental samples of rye-wheat flour: *a* – sample 5; *b* – sample 6.

The mass of gluten and flour was determined on the electric analytic scales of ANG series (Ukraine), humidity of gluten and flour was determined by the gravimetric method using the thermal chamber UF55 Memmert (Germany) and apparatus BHIIXII-BЧ (Ukraine). The concentration of the saccharose solution – on the laboratory refractometer IRF-454B2M (Russia). DTA was realized on the derivatograph Q1500D («Paulik – Erdey» – Hungary. Microscopy on the monocular microscope Micromed 1var 1 – 20 (Russia).


Fig. 3 presents devices, used for studying physical-chemical characteristics of the experimental samples of rye-wheat gluten and rye-wheat flour.



a b c d



e f

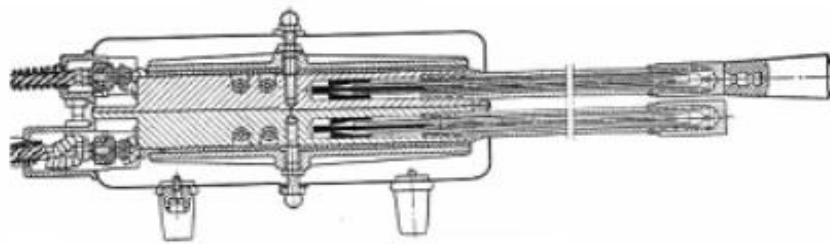

g

Fig. 3. The devices, used for studying parameters of dough and bread: *a* – hand device for titration; *b* – electronic analytic scales ANG; *c* – thermal chamber UF55 Memmert; *d* – monocular microscope Micromed 1 var 1 – 20; *e* – laboratory refractometer IRF-B; *f* – derivatograph Q1500D (Paulik – Erdey); *g* – device BHIXII-BЧ

2.2. Methods of determining organoleptic, physical-chemical and technological parameters

The standard research methods, considered below [20–25] and SSU-B 4583:2006 were used at the study.

The determination of humidity was made according to the standard accelerated

method according to SSU-P 4583:2006. Its essence is in drying the batch of the experimental sample of rye-wheat gluten or flour at a certain temperature and determination of humidity [21–23].

Determination of humidity of gluten and flour. Humidity of W_T was determined just after blending (and also after keeping the experimental samples in the thermal chamber at 20 °C during 6 hours, 12 hours, 18 hours, 24 hours, 36 hours, 72 hours) by the express method of drying at temperature 160°C on BHIIXII-BЧ by following methodology [20–23]: two batches of the experimental sample of gluten or flour in 5 g are weighed on the analytic scales with exactness up to 0,001g. These batches are dried on BHIIXII-BЧ during 5 minutes, cool in the dessicator during 1–2 minutes. After that they are weighted on the analytic scales again with exactness 0,001g. W_T is calculated by the difference in gluten or flour mass before and after their drying (by the dry residue) by formula (1):

$$W_T = (M_1 - M_2) / M_1 \cdot 100\%, (1)$$

where W_T – humidity of gluten or flour, %;

M_1 – mass of batch of gluten or flour before drying, g;

M_2 – mass of batch of gluten or flour before drying, g;

Determination of moisture-retaining power of gluten and flour by the method, based on a certain amount of water [21, 22]. Gluten or flour is put in a dish up to the top, smoothed, and a hollow is made in the middle of it by a spoon or spatula. Then the certain amount of usual water (10 or 20 cm³) is measured by a pipette and blended with gluten or flour by the spatula, then the dough system is pressed by the hands. Blending is finished, when the dough system acquires the required consistence. After that it is weighed, and water amount, bound by 1100 g of gluten or flour is calculated. The moisture-retaining power (X) is calculated by formula (2):

$$X = 100 \cdot a / (B - a), (2)$$

Where X – moisture-retaining power (MRP) of gluten or flour, %;

a – amount of usual water, cm³;

B – mass of gluten or flour, g.

At studying MRP of dry gluten and flour, the experimental samples of the first blending and X determination, % were kept in the thermal chamber at 20 °C during 6 hours 12 hours, 18 hours, 24 hours, 36 hours, 72 hours. Then their mass was determined on the analytic scales with exactness up to 0,01g. The moisture-retaining power (X) was calculated by formula (3):

$$X = 100 \cdot a / B, (3)$$

Where X – moisture-retaining power (MRP) of gluten or flour, %;

a – mass of the dough system of gluten of flour with water after storage, g.

B – initial mass of gluten or flour, g.

Determination of hydration power (HP) or gluten hydration [21 –23] at

storage was realized on the studied samples of raw gluten, kept in the thermal chamber at 20 °C during 6 hours 12 hours, 18 hours, 24 hours, 36 hours, 72 hours. Then their mass was determined on the analytic scales with exactness up to 0,01g. For determining the amount of raw gluten, it was dried and weighed. Drying was realized in the drying chamber during 1 hour at temperature 60–70 °C, then 2 hours more at temperature 120 °C up to the constant mass. Hydration power (HP) was calculated by formula (4):

$$HP = 100 \cdot (m_2 - m_1) / m_1, (4)$$

Where HP –hydration power of raw gluten, %;

m_2 – mass of raw gluten, g;

m_1 – mass of dry gluten, g.

The mass share of bound and free moisture was determined by the indicator method [26] and one of differential-thermal analysis (DTA) [27].

According to M.I. Knyagenichev's method [26] the batch of the studied sample of gluten or flour in amount 4 g was kept during 5 min with 20 cm³ of 10% solution of saccharose. The calculation of *bound moisture* is conducted by formula (5):

$$X = B \cdot (b_2 - b_1) / P \cdot b_2, (5)$$

where X – amount of bound moisture, g for 1 g of dry substance (DS);

b_1 and b_2 – initial and output concentrations of saccharose solution, %;

B – mass of 20 cm³ 10% saccharose solution, g;

P – batch of dry substance (DS), g.

According to A.I. Ermakov's methodology [26] the batch of the experimental sample of gluten or flour in amount 5 g is placed in a flask with 15 cm³ of 60% saccharose solution. After 5 min keeping, it is filtered and its concentration is measured on the refractometer IRF-454B2M. The results of determination are used for calculating *free water* by formula (6):

$$Y = (C_0 - C_1) \cdot m \cdot 100 / C_1 \cdot g \cdot W, (6)$$

where Y – content of free water, % of the total content;

C_0 – initial concentration of saccharose solution, %;

C_1 –Final concentration of saccharose solution, %;

m – mass of output saccharose solution, g;

g – batch of the experimental sample of gluten or flour, g.

W – total content of water in 1 g of the experimental sample of gluten or flour, g.

For DTA, there was used the derivatograph Q1500D (Paulik – Erdey). The studies were conducted in quartz melting pots with batch mass 1 g. Al₂O₃, fried to 1773 K was used as an etalon. Samples were heated to 473 K with heating speed 3 K / min. [27].

Microscopy of the experimental samples was realized on the monocular microscope Micromed 1 var 1 – 20 [27]. Preparations for microscopy were prepared

in the following way. The sample in amount 1– 2 mg was placed on the subject glass, covered with the coating glass, accurately rubbed along the circle by a rubber. The sample was analyzed by the microscope (magnification 100).

3. Results

Research methods, considered in section 2 will have the practical use at studying functional-technological characteristics, especially, the moisture-absorbing and moisture-retaining power of gluten and flour.

Fig. 4 and 5 present the influence of the food supplement “Magnetofood” on the moisture-retaining power (MRP) of dry rye-wheat gluten and flour in the experimental samples.

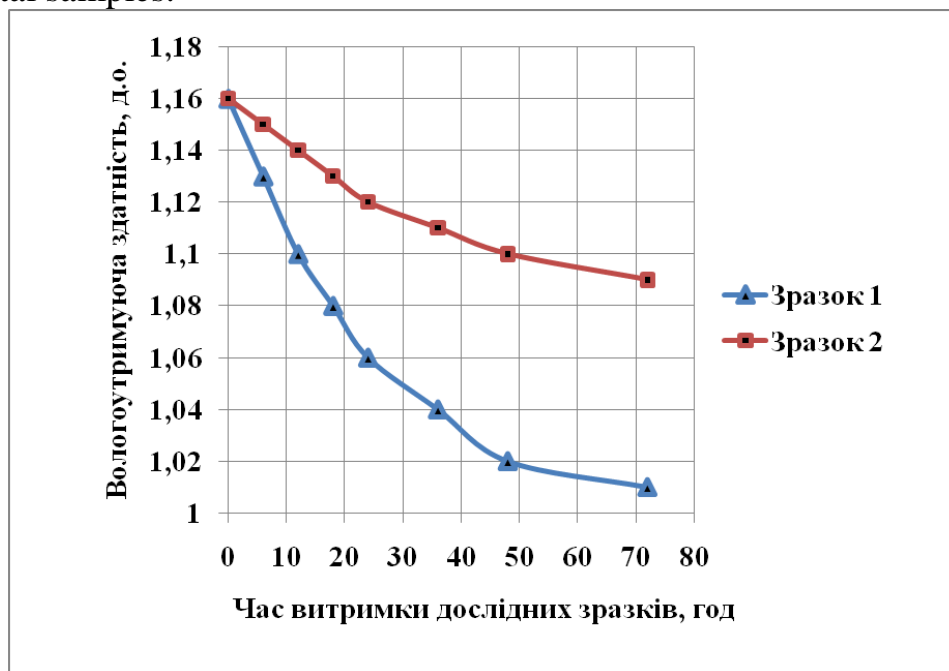
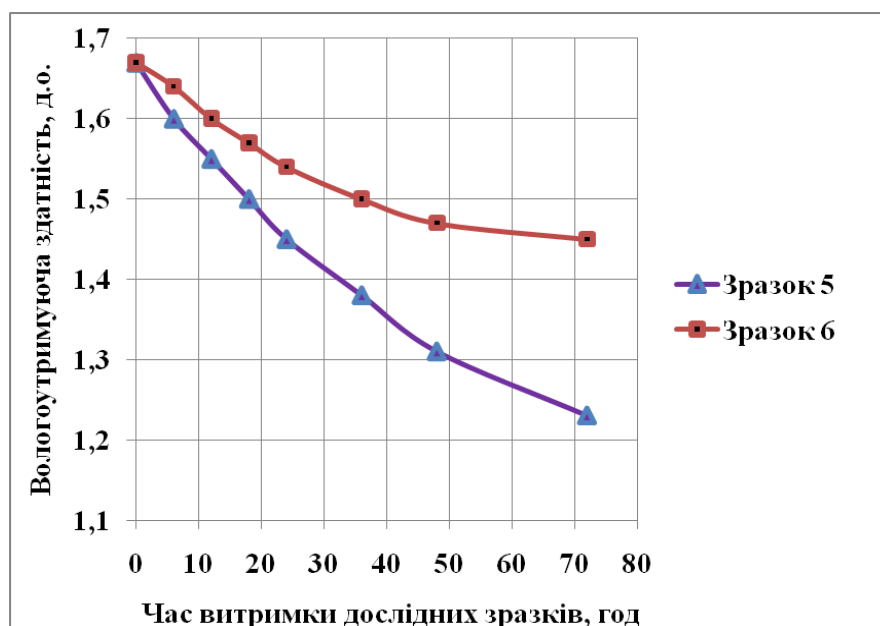


Fig. 4. influence of the food supplement “Magnetofood” on the moisture-retaining power of the experimental samples of dry rye-wheat gluten at storage



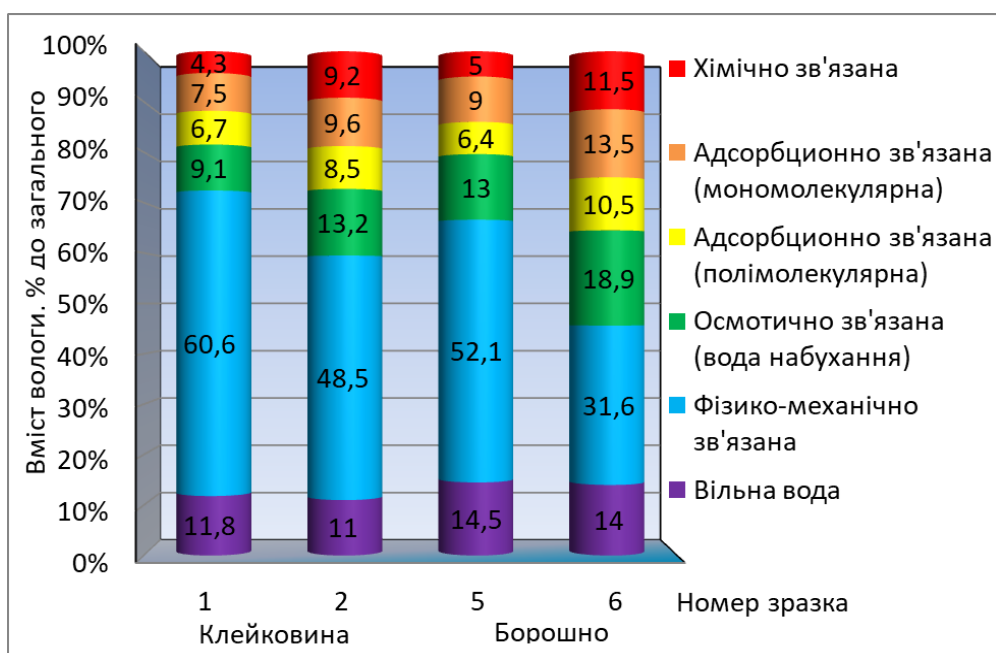


Fig. 7. Influence of the food supplement “Magnetofood” on the ratio of water of different binding forms of the experimental samples of dry rye-wheat gluten and flour at storage during 72 hours

The experimental data of **fig. 6 and 7** prove the fact that the polyfunctional food supplement “Magnetofood” favors the increase of water-absorbing and water retaining power of rye-wheat gluten and rye-wheat flour.

Table 1

The influence of the food supplement “Magnetofood” on the ratio of bound and free, osmotic and physical-mechanical water of the experimental samples of dry rye-wheat gluten and flour at storage by the indicator method (IM) and one of differential-thermal analysis.

Experimental samples of gluten and flour	Amount of free, osmotic and physical-mechanical moisture, %				Amount of bound moisture, %			
	Storage duration, hours							
	1		72		1		72	
	IM	DTA	IM	DTA	IM	DTA	IM	DTA
Sample 1 Control	78,7±0,5	77,0±0,2	72,7±0,5	71,0±0,2	21,3±0,5	23,0±0,2	27,3±0,5	29,0±0,2
Sample 2	69,0±0,5	68,0±0,2	72,7±0,5	71,2±0,2	31,0±0,5	32,0±0,2	27,3±0,5	28,8±0,2
Sample 5 Control	76,1±0,5	75,1±0,2	79,6±0,5	78,1±0,2	23,9±0,5	24,9±0,2	20,4±0,5	21,9±0,2
Sample 6	62,7±0,5	61,5±0,2	64,5±0,5	63,2±0,2	37,3±0,5	38,5±0,2	35,5±0,5	36,8±0,2

According to the data of table 1, 1/4 shares of the total amount of water in the

experimental samples of dry rye-wheat gluten and flour are bound, and 3/4 shares are free, osmotic and physical-mechanical.

The research results confirm the important functional-technical property of the food supplement “Magnetofood” – moisture-retaining power.

The obtained experimental data may be used in the technology of rye-wheat bread, enriched with the food supplement “Magnetofood”.

4. Conclusions

1. The research methods of flour, gluten and model systems, based on them, presented in the work, may be used at studying the influence of diverse supplements, improvers, technological holds and so on functional-technological characteristics, especially moisture-retaining power of wheat-rye dough and bread of it.

Using the considered methodologies, scientists can study the influence of diverse complex food supplements on humidity, water-absorbing and water-retaining power of model systems, based on gluten and flour and also ready products in future; to study the amount of bound and free moisture in diverse dough semi-products more detail.

The shortcoming of this work is the fact that the effect of the offered methods was considered only on one type of model systems – rye-wheat and the influence of only one food supplement – polyfunctional food supplement “Magnetofood” on the given model system was studied. It is also unknown, how this supplement influences technological parameters of dough of another recipe composition (of different types and sorts of flour).

The positive side is the fact that the research methods, offered in the work, may be used for studying functional-technological characteristics, especially moisture-retaining ability of not only rye-wheat dough and ready products, but also rye, wheat and so on.

At the same time, the research results may be used in the technology of rye-wheat bread with adding the polyfunctional food supplement “Magnetofood”.

References

[1]. Булдаков А. Пищевые добавки : Справочник. – 2-е изд., перераб. и доп. – М.: СПб. – 2008. – 280 с.

[2]. Матвеева, И.В. Пищевые добавки и хлебопекарные улучшители в производстве хлеба: учебник / И.В. Матвеева, И.Г. Велицкая. – Нсб.: Сиб. унив. изд-во, 1998. – 328 с.

[3]. Колпакова, В. В., Студенникова, О. Ю. Гидратационная способность и физико-химические свойства белков пшеничной клейковины / В. В. Колпакова, О. Ю. Студенникова // Известия вузов. Пищевая технология.– Краснодар: Кубанский государственный технологический университет, 2009.– № 2–3.– С. 5–8.

[4]. Ауэрман, Л.Я. Технология хлебопекарного производства: учебник / под ред. Л.И. Пучковой. – СПб.: Профессия, 2003. – 253 с.

[5]. Чугунова О.В., Пастушкова Е.В. Моделирование органолептических показателей хлеба с растительными добавками / О.В. Чугунова, Е.В.

Пастушкова // Вестник ЮУрГУ. Серия «Пищевые и биотехнологии». – Екатеринбург: Издательский центр ЮУрГУ, 2015. – Т.3, № 4. – С.80– 87.

[6]. Тамазова С.Ю., Лисовой В.В., Першакова Т. В., Казиминова М.А. Пищевые добавки на основе растительного сырья, применяемые в производстве хлебобулочных и мучных кондитерских изделий / С. Ю. Тамазова, В. В. Лисовой, Т. В. Першакова, М. А. Казиминова // Политематический сетевой электронный научный журнал КубГАУ.– Краснодар: Изд-во федерального государственного бюджетного образовательного учреждения высшего образования КУБГАУ им. И.Т. Трубилина, 2016.– № 122(08). – С. 1–8

[7]. Росляков Ю. Ф., Вершинина О. Л., Гончар В. В. Научные разработки для хлебопекарной и кондитерской отраслей / Ю.Ф. Росляков, О. Л. Вершинина, В.В. Гончар // Технологии пищевой и перерабатывающей промышленности АПК-продукты здорового питания. – Воронеж: Изд-во Ассоциация ТПП АПК, 2016. – № 6. – С.1 – 6.

[8]. Росляков Ю. Ф., Вершинина О. Л., Гончар В. В. Перспективные исследования технологий хлебобулочных изделий функционального назначения / Ю.Ф. Росляков, О. Л. Вершинина, В.В. Гончар // Известия вузов. Пищевая технология. – Краснодар: Изд-во КубГТУ, 2010. – № 1. – С.123 – 125.

[9]. Справочник по гидроколлоидам / Г.О. Филипс, П.А. Вильямс (ред.); пер. с англ., под ред. А.А. Кочетковой и Л.А. Сарафановой. – СПб.: ГИОРД, 2006. – 536 с.

[10]. Цитрусовые волокна Herbacel AQ Plus – тип N: спецификации для пищевых добавок и рецептуры, 2013. – Режим доступа: <http://specin.ru>.

[11]. Ngemakwe, P. N., Le Roes-Hill, M., Jideani, V. (2014). Advances in gluten-free bread technology. Food Science and Technology International, 21 (4), 256–276. doi: 10.1177/1082013214531425

[12]. Bird, L. G., Pilkington, C. L., Saputra, A., Serventi, L. (2017). Products of chickpea processing as texture improvers in gluten-free bread. Food Science and Technology International, 108201321771780. doi: 10.1177/1082013217717802

[13]. García-Segovia, P., Pagán-Moreno, M. J., Lara, I. F., Martínez-Monzó, J. (2017). Effect of microalgae incorporation on physicochemical and textural properties in wheat bread formulation. Food Science and Technology International, 23 (5), 437–447. doi: 10.1177/1082013217700259

[14]. Boubaker, M., Omri, A. E., Blecker, C., Bouzouita, N. (2016). Fibre concentrate from artichoke (*Cynara scolymus* L.) stem by-products: Characterization and application as a bakery product ingredient. Food Science and Technology International, 22 (8), 759–768. doi: 10.1177/1082013216654598

[15]. Alexandr Alexandrov, Iryna Tsykhanovska, Victoria Evlash, Karina Svidlo, Tatyana Gontar / Influence of the polyfunctional food supplement «Magnetofood» on the quality of the wheat bread «Darnitsky» in the storage process // Восточно-Европейский журнал передовых технологий. – 2017.– Vol. 5 /11, No 89 – pp. 61–70.

[16]. Alexandr Alexandrov, Iryna Tsykhanovska, Victoria Evlash, Karina Svidlo, Tatyana Gontar / Research quality of the wheat–rye bread with addition of the polyfunctional food supplement “Magnetofood”// "EUREKA: Life Sciences".–

2017.– No 5 – pp. 45–52.

[17]. Iryna Tsykhanovska, Victoria Evlash, Alexandr Alexandrov, Tatyana Lazareva, Karina Svidlo, Tatyana Gontar / Design of technology for the rye-wheat bread “Kharkivski rodnichok” with the addition of polyfunctional food supplement “Magnetofood” // Восточно-Европейский журнал передовых технологий. – 2017.– Vol. 6 /11, No 90 – pp. 48–58.

[18]. Alexandr Alexandrov, Iryna Tsykhanovska, Victoria Evlash, Tatyana Lazareva, Karina Svidlo, Tatyana Gontar / Research into technological indicators of a rye-wheat dough semi-finished product with the addition of the polyfunctional food supplement “Magnetofood” // "EUREKA: Life Sciences".–2017.– No 6 – pp. 43–50.

[19]. Ершов П.С. Сборник рецептов на хлеб и хлебобулочные изделия / П.С. Ершов.– Санкт-Петербург: Профи-информ, 2004. – 190 с.

[20]. Личко Н. М. Технология хлебопекарного производства / Н. М. Личко // Под ред. Н. М. Личко. – М.: Колос. – 2000. – 552 с.

[21]. Методы анализа пищевых сельскохозяйственных продуктов и медицинских препаратов: [Пер. с англ.]. – М.: Пищ. пром-сть, 1974. – 743 с.

[22]. Корячкина С.Я. Методы исследования качества хлебобулочных изделий: учебно-методическое пособие для вузов / С.Я. Корячкина, Н.А. Березина, Е.В. Хмелева. – Орел: ОрелГТУ, 2010. – 166 с.

[23]. Касымова Ч.К. Лабораторный практикум по курсу «Технология хлеба, кондитерских и макаронных изделий» / Ч.К. Касымова. – Бишкек: Кыргызский государственный технический университет им. И. Раззакова, 2012. – 48 с.

[24]. Экспертиза хлеба и хлебобулочных изделий, качество и безопасность: Учеб.- справ. пособие./ А.С. Романов, Н.И. Давыденко, Л.Н. Шатнюк и др. – Новосибирск: Сиб. унив. из-во, 2005. – 278 с.

[25]. Боташева Г. Ю. Технологія виробництва хлібобулочних виробів: методичні вказівки для самостійної роботи студентів напряму підготовки 151000.62 Технологічні машини та обладнання / Г. Ю. Боташева. – Черкеськ: БІЦ СевКавГГТА, 2013. – 43 с.

[26]. Юрчак В. Г., Берзина Н. И., Шмаровоз В. М., Прищепа М. П. Определение связанной воды индикаторным методом в хлебопекарном производстве / В. Г. Юрчак, Н. И. Берзина, В. М. Шмаровоз, М. П. Прищепа // Известия Вузов. Пищевая технология. – № 4. – Киев: Киевский ордена Трудового Красного Знамени технологический институт пищевой промышленности, 1989. – С. 78–80.

[27]. Нилова, Л. П., Калинина, И. В., Науменко Н. В. Метод дифференциально-термического анализа в оценке качества пищевых продуктов / Л. П. Нилова, И. В. Калинина, Н. В. Науменко // Вестник ЮУрГУ. Серия «Пищевые и биотехнологии». – Челябинск: Федеральное государственное бюджетное образовательное учреждение высшего профессионального образования Южно-Уральский государственный университет (национальный исследовательский университет), 2013. – Т. 1. – № 1. – С 43 – 49.

[28]. Александров, О. В., Цихановська, І. В., Лазарева Т. А., Павлоцька Л. Ф., Гонтар Т. Б. Використання жиромігнетитової суспензії для підвищення харчової цінності цукерок «Сухофрукти в шоколаді», збагачених залізовмісною харчовою добавкою // Повноценне харчування: інноваційні аспекти технології, енергоефективного виробництва, зберігання та маркетингу: колективна монографія /за ред. проф. В. В.Євлаш, проф. В. О. Потапова, проф. М. І.Радченко, проф. Н. Л. Савицької. – Х.: Світ книг, 2016. – С. 143 – 170.